

Wolf-Hook Lanyard

For attaching weapons to Load Bearing Harness Systems

FOLLOW STEPS 1 THROUGH 7 TO CONFIGURE THE WOLF-HOOK ON YOUR COLLAPSIBLE BUTTSTOCK WEAPON. USE THE ASSEMBLY PARTS LIST FOR REFERENCE.

Instructions for Wolf-Hook on load bearing harness


Master Parts Reference for Wolf-Hook Lanyard

USE THE ASSEMBLY PARTS LIST FOR REFERENCE


1 FIRST, remove the sling from the package and separate it into two main components, as shown.

WEAPON MOUNTING STRAP


HARNESS STRAP

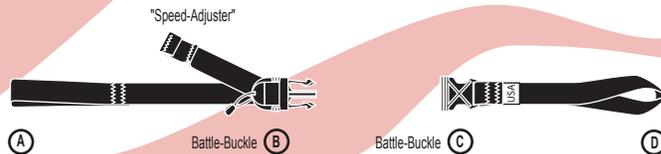


2 Pass "A" of the WEAPON MOUNTING STRAP through the sling slot on the buttstock of the weapon.

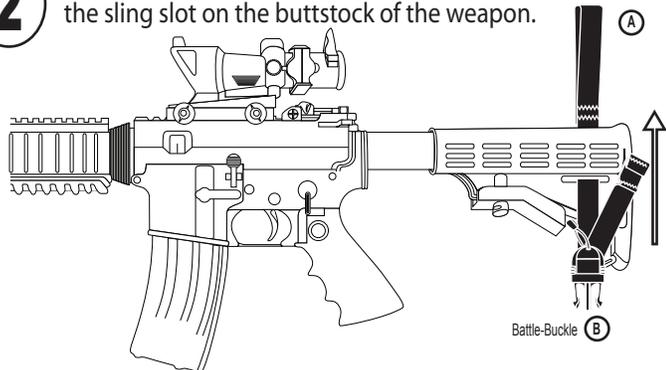


3 Pass Battle-Buckle "B" through the loop end "A" of the WEAPON MOUNTING STRAP. Tighten the loop until it is snug against the buttstock of the weapon.

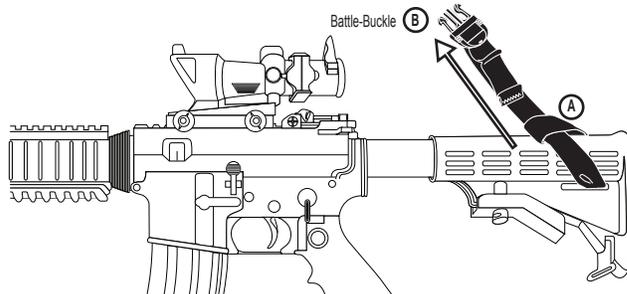


4 Feed "D" of the HARNESS STRAP through the D Ring (or webbing cross-loop) on the harness shoulder pad.

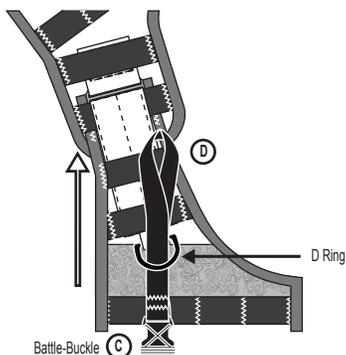

5 Loop Battle-Buckle "C" back through the loop end "D" of the HARNESS STRAP. Tighten the loop until it is snug against the D Ring.

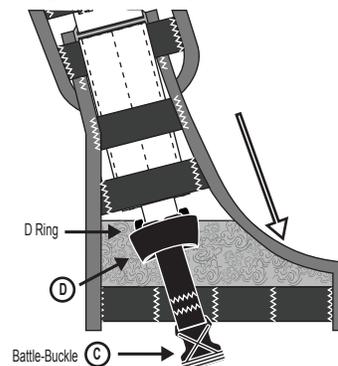

6 Connect Battle-Buckle "C" of the HARNESS STRAP to Battle-Buckle "B" of the WEAPON MOUNTING STRAP.

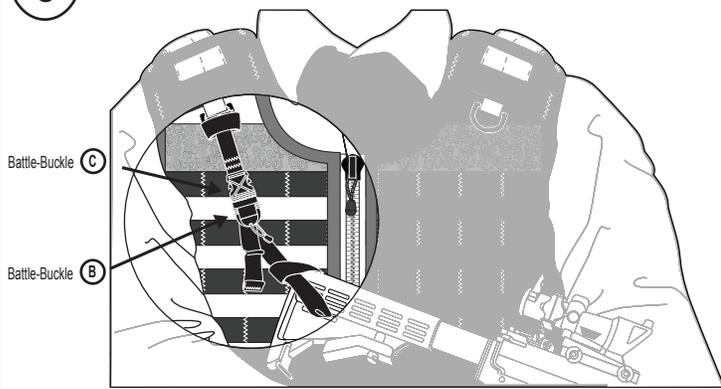

7 Use the "Speed Adjuster" for adjusting purposes.

